

eldoLED

Small Form Factor Driver Solutions



Superior Performance in a Surprising Size

eldoLED small form factor driver solutions deliver the needed performance for your LED miniaturization designs. ECOdrive, SOLOdrive, and OPTOTRONIC® models offer the Quality of Light advantages and dimming capabilities modern lighting uses to enhance our experiences.

View the full line of eldoLED small form factor solutions at
www.eldoLED.com/smallformfactor

- **Bring new levels of performance to small aperture lighting**
- **Full programmable driver portfolio to meet design requirements**
- **Unmatched dimming performance with SOLOdrive Dim to Dark (0.1%)**
- **Compatibility with your control protocols**




Certified to North American Standards



Dimensions

Bottom feed and side feed connections available for different compartment designs.

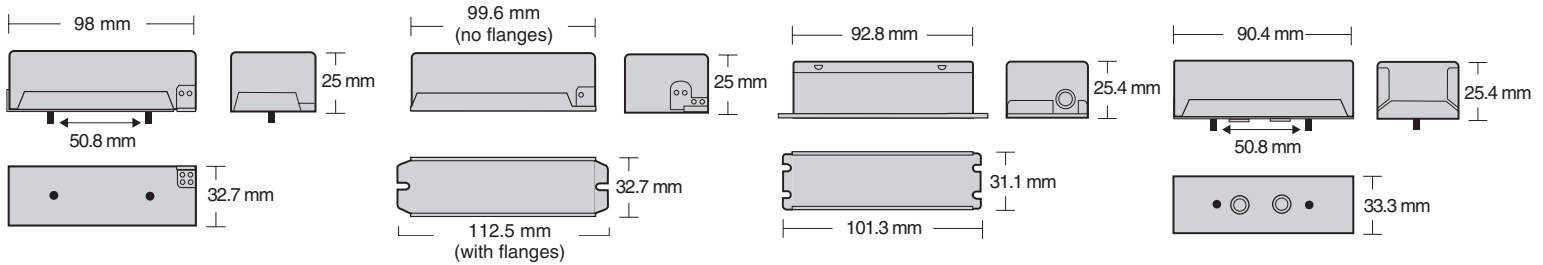

B: Bottom Feed (ECOdrive, SOLOdrive)

S: Side Feed (ECOdrive, SOLOdrive)

F: Side Feed (OPTOTRONIC)

J: Bottom Feed (OPTOTRONIC)

Small Form Factor (SFF) Reference Chart

Use this chart to select the right small form factor driver for your application. For complete model specifications, visit www.eldoled.com/smallformfactor.

ECOdrive 22W	ECOdrive 12W	Form Factor	LEDcode	0-10V	DALI-2	Phase-Cut	Min. Dimming
ECOdrive 22B-M1M0Z	ECOdrive 12B-M1M0Z	B	●				1%
ECOdrive 22B-M1Z0A	ECOdrive 12B-M1Z0A	B		●			1%
ECOdrive 22B-M1Z0D	ECOdrive 12B-M1Z0D	B	●		●		1%
ECOdrive 22S-M1M0Z	ECOdrive 12S-M1M0Z	S	●				1%
ECOdrive 22S-M1M1Z	ECOdrive 12S-M1M1Z	S (no flanges)	●				1%
ECOdrive 22S-M1Z0A	ECOdrive 12S-M1Z0A	S		●			1%
ECOdrive 22S-M1Z0D	ECOdrive 12S-M1Z0D	S	●		●		1%
ECOdrive 22S-M1Z1A	ECOdrive 12S-M1Z1A	S (no flanges)		●			1%
ECOdrive 22S-M1Z1D	ECOdrive 12S-M1Z1D	S (no flanges)	●		●		1%
SOLOdrive 22W	SOLOdrive 12W						
SOLOdrive 22B-M1M0Z	SOLOdrive 22B-M1M0Z	B	●				0.1%
SOLOdrive 22B-M1Z0A	SOLOdrive 22B-M1Z0A	B		●			0.1%
SOLOdrive 22B-M1Z0D	SOLOdrive 22B-M1Z0D	B	●		●		0.1%
SOLOdrive 22S-M1M0Z	SOLOdrive 22S-M1M0Z	S	●				0.1%
SOLOdrive 22S-M1M1Z	SOLOdrive 22S-M1M1Z	S (no flanges)	●				0.1%
SOLOdrive 22S-M1Z0A	SOLOdrive 22S-M1Z0A	S		●			0.1%
SOLOdrive 22S-M1Z0D	SOLOdrive 22S-M1Z0D	S	●		●		0.1%
SOLOdrive 22S-M1Z1A	SOLOdrive 22S-M1Z1A	S (no flanges)		●			0.1%
SOLOdrive 22S-M1Z1D	SOLOdrive 22S-M1Z1D	S (no flanges)	●		●		0.1%
OPTOTRONIC 12W							
OT 12W 0A3 UNV DUALDIM DIM-5 F-HOUSING		F		●		●	5%
OT 12W 0A3 UNV DUALDIM DIM-5 J-HOUSING		J		●		●	5%
OPTOTRONIC 20W							
OT 20W 0A5 UNV DUALDIM DIM-5 F-HOUSING		F		●		●	5%
OT 20W 0A5 UNV DUALDIM DIM-5 J-HOUSING		J		●		●	5%

eldoLED

One Lithonia Way
 Conyers, GA 30012
 United States
 +1 877 353 6533
 nasupport@eldoLED.com
 www.eldoLED.com

Rev 042023 © 2023 Acuity Brands Lighting, Inc.
 Specifications subject to change without notice. Actual performance may differ as a result of end-user environment and application.